

APOLLON AUDIO

Premium

The image shows two identical APOLLON PET950 MONOBLOCK amplifiers stacked on top of each other. The top unit is slightly offset to the right. The front panel of the top unit features a power switch, two volume knobs, and a central input selector knob. A gold-colored logo with the word 'APOLLON' is centered over the gap between the two units.

APOLLON

PET950 MONOBLOCK

REFERENCE MANUAL

HANDMADE IN **SLOVENIA** - EUROPE

Table of contents

Safety warnings	3
Introduction	4
Front panel controls	5
Back panel connections	6
Connectivity diagram	7
Technical specifications	8
Components	9

**EXPERIENCE SOUND
THAT PUTS A SMILE
ON YOUR FACE**

Safety warnings

1. Please read and follow these instructions before using the amplifier.
2. Do not use this apparatus near water.
3. Clean only with a dry cloth.
4. Do not block any ventilation openings.
5. Do not install near any heat sources (including amplifiers) that produce heat.
7. The unit generates heat especially during prolonged operation at intensive levels.
Please do not cover or place objects on top. When rack mounting it is recommended to leave space above the unit to allow free circulation of air.
8. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
9. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
10. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus.
When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
11. Any terminals marked with the preceding symbol are HAZARDOUS LIVE and any wiring connected to these terminals must be installed by an INSTRUCTED PERSON or with ready-made leads or cords.
12. Unplug this apparatus during lightning storms or when unused for long periods of time.
13. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.



This symbol indicates that there are important operating and maintenance instructions in the literature accompanying your shelf system.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE. DO NOT EXPOSE THIS EQUIPMENT TO DRIPPING OR SPLASHING AND ENSURE THAT NO OBJECTS FILLED WITH LIQUIDS, SUCH AS VASES, ARE PLACED ON THE EQUIPMENT. TO COMPLETELY DISCONNECT THIS EQUIPMENT FROM THE AC MAINS, DISCONNECT THE POWER SUPPLY CORD PLUG FROM THE AC RECEPTACLE. THE MAINS PLUG OF THE POWER SUPPLY CORD SHALL REMAIN READILY OPERABLE.

Introduction

Thank you for choosing our product.
We are honored to have customers like you.


...

We are specialised in crafting handbuilt world class Class D Amplifiers that are changing Pro Audio and Audiophile users perceptions about Class D Amps. We live for sound quality and our line of products is the manifestation of this belief while at the same time offering exceptional value for your money.


At Apollon Audio we use only the best materials and connectors available on the market and also give you the option of configuring the enclosure to what suits you the best. Because of the transparency and uncoloured dynamic sound our products are best suited for the most demanding pro audio users and audiophiles that are not ready to make any compromises and settle for only the best.

Tibor Markset
Tibor Markset
owner

Front panel

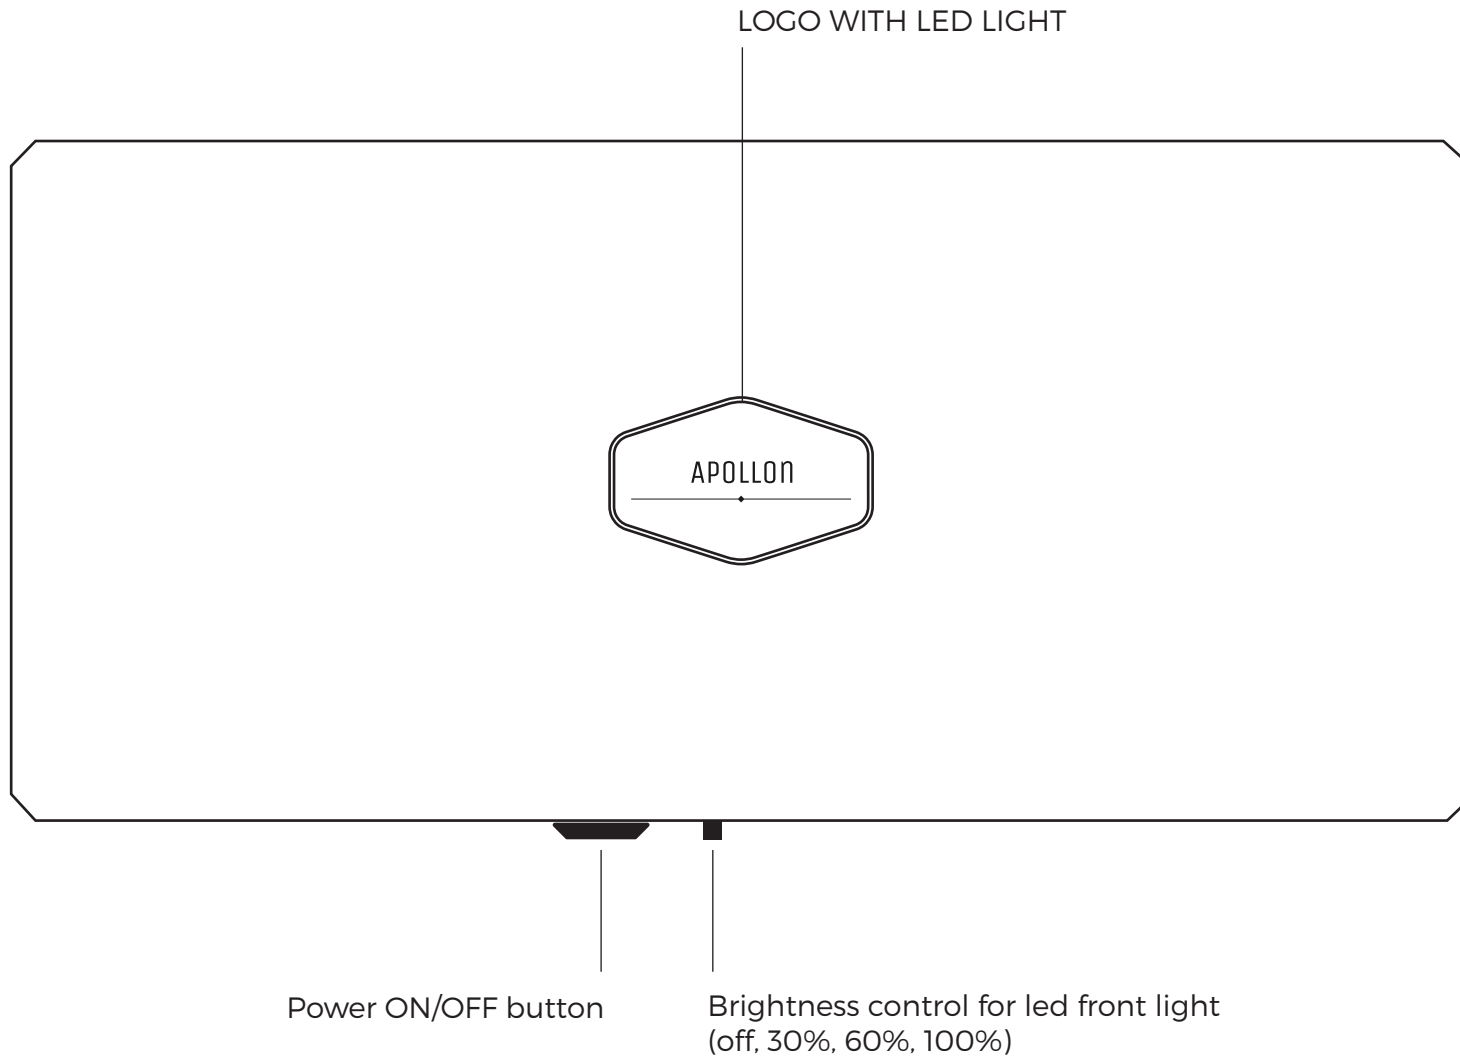


Back panel

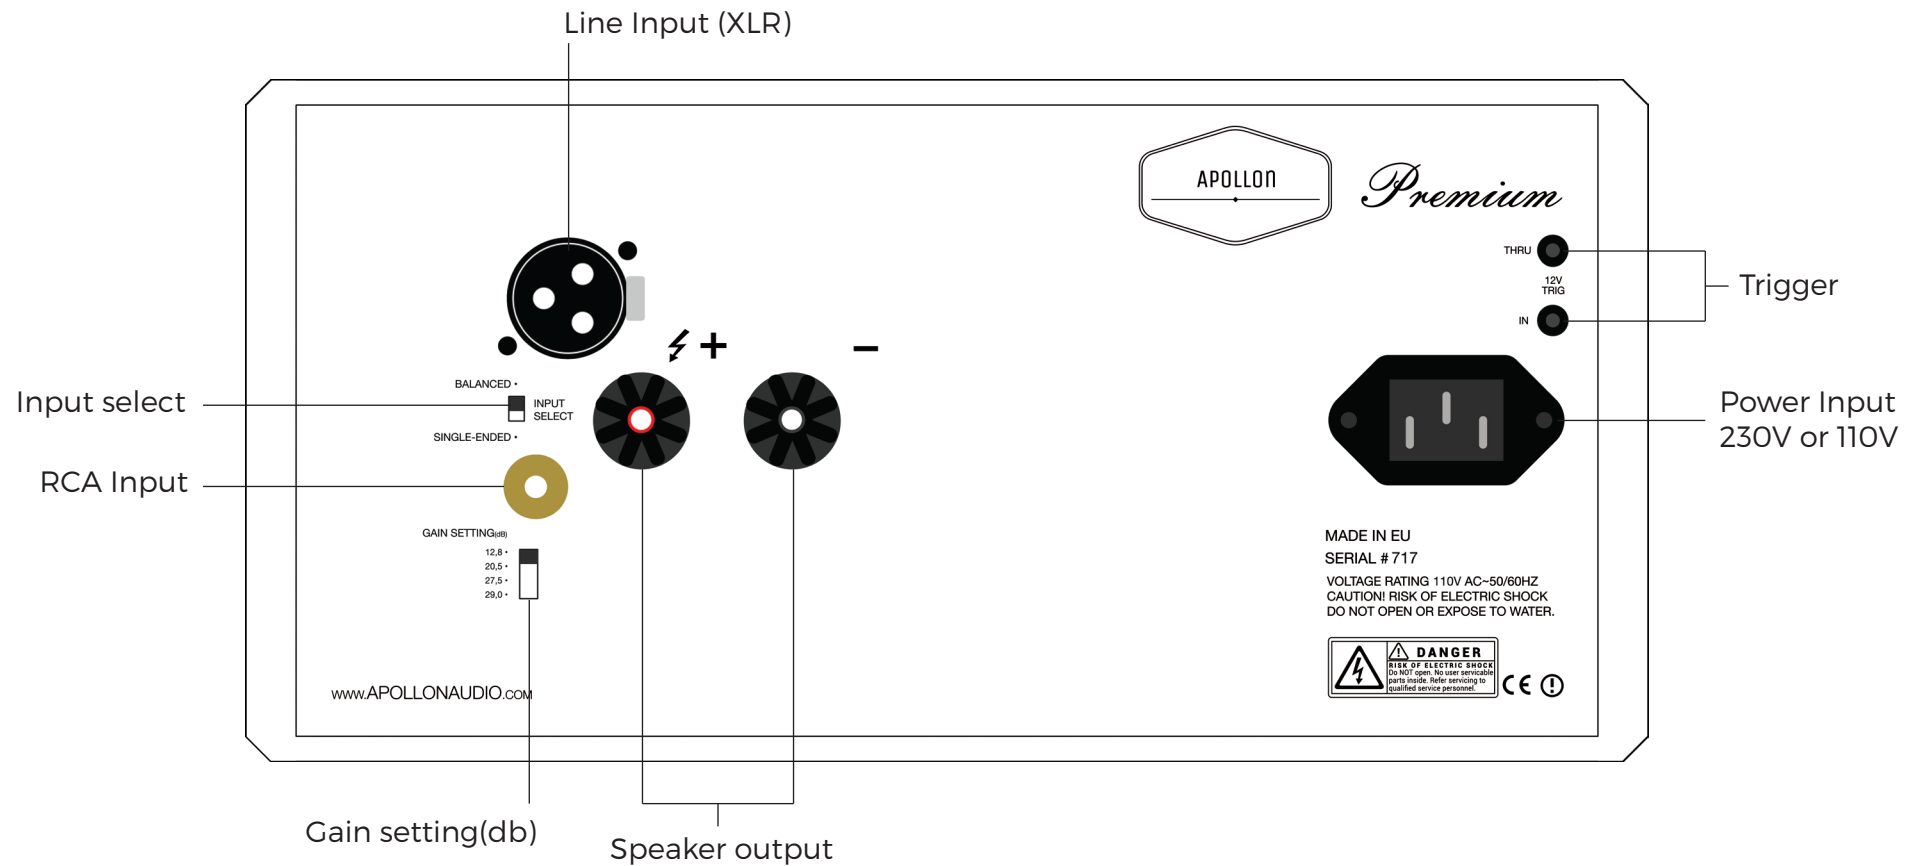

- ! Turn power off before inserting or removing cables.
- When rack mounting it is recommended to leave space above the unit to allow free air circulation.

Connectivity diagram

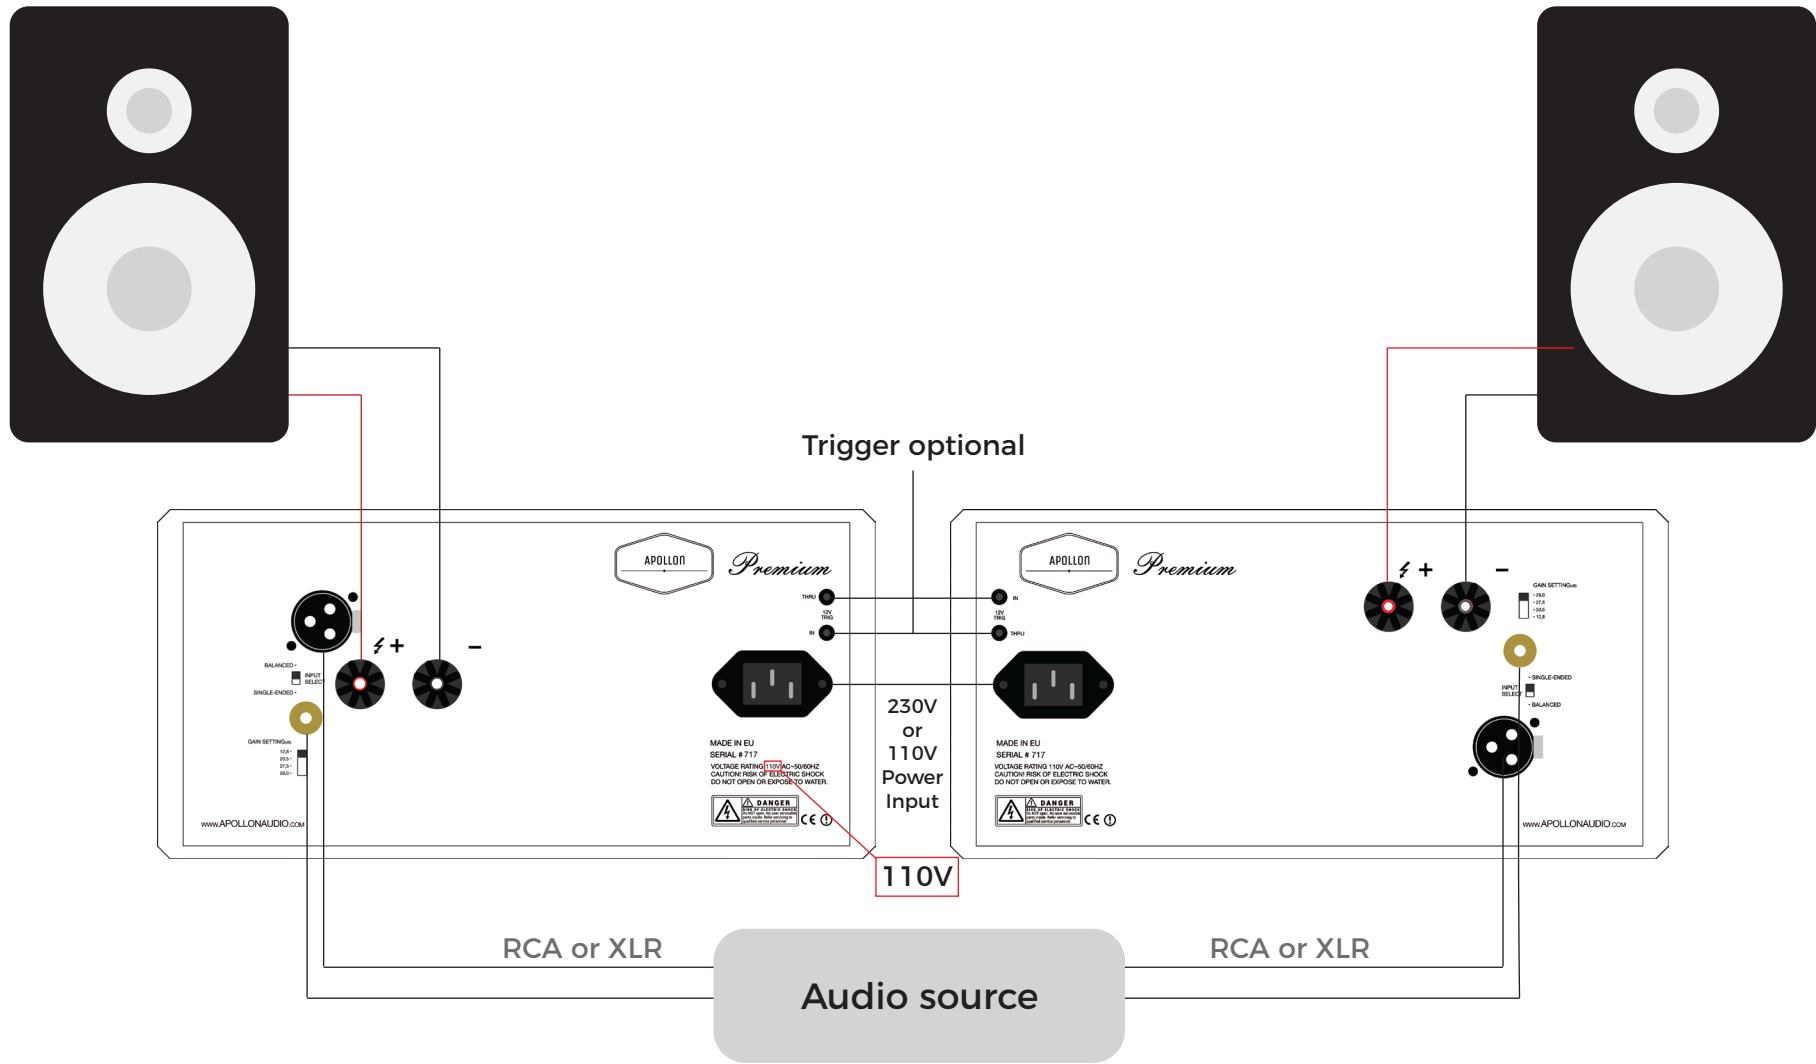

Technical specifications

True Mono Design

Frequency Response: 0 - 50k Hz +/-3dB

Low Distortion: THD+N - 0.00035 % @ 200W, 4Ω, 1kHz

High Input Impedance 100K

Signal-to-noise ratio: 129dB

28 dB Gain

Ultra High Damping Factor

High Current Output Max 40A Capable of driving 2ohm (for the Most Demanding of Speakers)


Power rating: 950W @ 2ohm | 500W @ 4ohm | 250W @ 8ohm

Case Dimensions: 350mm depth x 156mm height (with feet) x 280 mm width

Weight: 11 kg

Components

- Hypex SMPS1200A400 (1 pcs.)
- Purifi 1ET7040SA amplifier (1 pcs.)
- Apollon Audio PET Input Buffer Board (1 pcs.)
- Weiss OP2-BP Op Amp (2 pcs.)
- Linear Power supply with LT3045/LT3094 (1 pcs.)
- Apollon Control Board for standby control
- Neutrik silver plated XLR line input socket (1 pcs.)
- Apollon Pure OFC copper binding posts (2 pcs.)
- Neotech UP-OCC 12AWG Solid Copper and 18AWG Pure Silver Speaker output wire
- 12V Trigger for wakeup from standby
- Furutech FI-06G High quality mains input socket
- Aluminium enclosure with anti-vibration aluminium feet

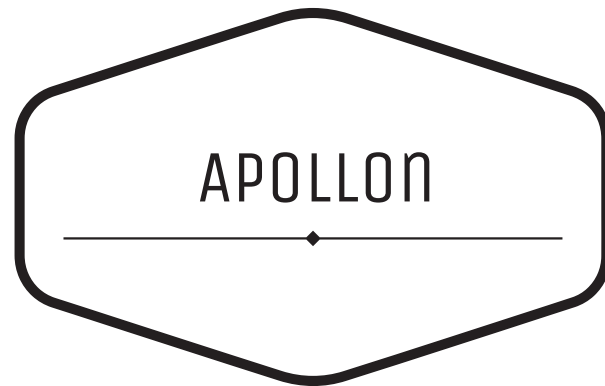

Apollon Audio d.o.o.

info@apollonaudio.com | www.apollonaudio.com